



接线图
Wiring Diagram



规格 SPECIFICATIONS

1	相数 Number of Phase	2
2	步距角 Step Angle	1.8° ±5%
3	保持力矩 Holding Torque	28 N.m
4	电压 Voltage	5.38 VDC
5	电流 Current	8.0 A
6	相电阻 Phase Resistance (20°C)	0.69 ±10% Ω
7	相电感 Phase Inductance (1KHz)	12.7 ±20% mH
8	转子惯量 Rotor Inertia	g · cm ²
9	绝缘电阻 Insulation Resistance	100M Ω 500VDC
10	绝缘等级 Insulation Class	B (130°C)
11	环境温度 Ambient Temperature	-20°C to 50°C
12	环境湿度 Ambient Humidity	15% to 95%
13	电机重量 Motor Weight	Approx 11.7 kg
14		

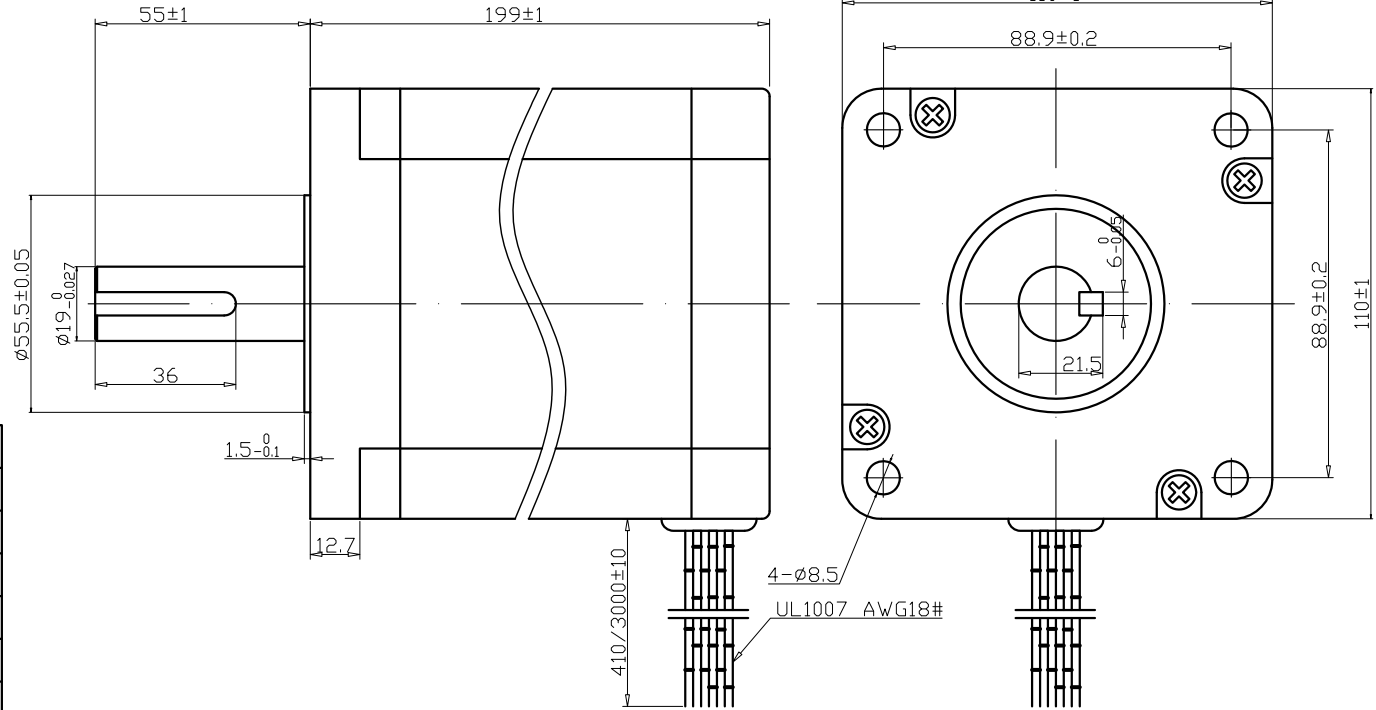

励磁顺序 (2相励磁)


EXITING SEQUENCE (2 PHASE)

STEP	A	B	\bar{A}	\bar{B}	CCW
1	+	+	-	-	↑
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	↓

原型号: 110BYGH450D-02B

NOTE: This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. Unless otherwise specified all trademarks and registered trademarks appearing on this document are the property of changzhou chuangwei motor & electric apparatus co., ltd.

Unit:mm
第一角画法
First angle method
未注线性与角度尺寸公差
Tolerances for linear and angular dimensions without individual tolerance indications
GB/T 1804-m eqv ISO 2768-1:m
未注形状与位置尺寸公差
Geometrical tolerances for features without individual tolerance indications
GB/T 1184-k eqv ISO 2768-2:k



设计 DESIGN

校核 CHECK

工艺 TECHNOLOGY

标准化 STANDARD

批准 APPROVE

NAMES

XH

20160407

SINGATURE

20160407

DATE

CW-motor



常州创伟电机电器有限公司

Changzhou Chuangwei Motor & Electric Apparatus Co., Ltd

TYPE: HYBRID STEPPING MOTOR

SCALE XX

Rev. 3.0

SHEET 1 OF 1

Model:

110BHH199-780-55

6	V3.0	HTPS1606031	20160603
	V2.0	换版本	20160407
	V1.0	版本记录 REVISION RECORD	xxx
	REV.	版本记录 REVISION RECORD	DATE